

## **Fitting Instructions:**


1. Remove the original bushes from transmission mount, clean any dirt and corrosion from the bores in the mount. Make sure to remove any sharp edges from the bore.

2. Fit polyurethane A bushes into the bore of the mount. As shown in Figure 1.

3. Apply supplied grease into bore of the bush and around top faces and fit in the stainless steel sleeve.

5. To increase rigidity of bush fit polyurethane B insert bushes into polyurethane A bushes. As shown in *Figure 2.* 

6. Refit bracket. Tension all hardware to manufacturers recommended torque settings.

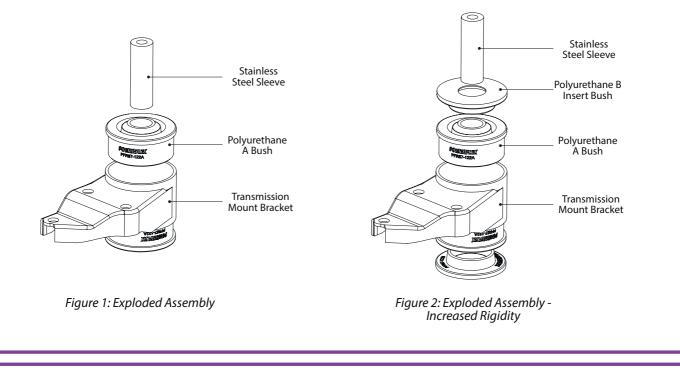

POWERFLEX

+44 (0) 1895 460033

sales@powerflex.co.uk

www.powerflex.co.uk